

WDS - H630 SERIES

4TH AXIS NC ROTARY TABLE


第四轴NC旋转台



特点

- 零背隙
- 滚动传递无磨损
- 精度高 效率好
- 有预压 刚性高
- No backlash(play)
- No wear because power transfers through rolling contact
- High accuracy and good efficiency
- Preload and high rigidity

型号规格

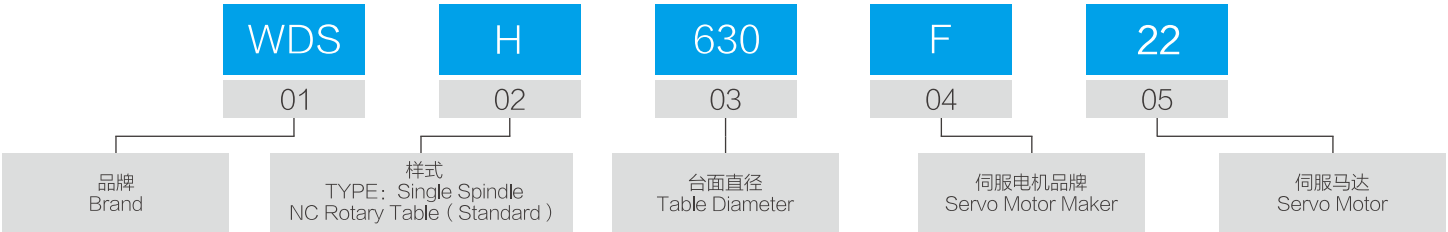

伺服电机品牌 Servo Motor Maker	F: FANUC	α 22i/ β 22is
	S: SIEMENS	
	P: PANASONIC	
	M: MITSUBISHI	HF354-A48
	H: HEIDENHAIN	
	L: LS MECAPION	
	Y: YASKAWA	SGMGV-30A
	FA: FAGOR	
	O: OKUMA	
	SY: SANYO	

最大承重 (kg)	输出轴允许力矩 (N · m)	输出轴平面跳动精度 (μm)
1800	6300	10
± 弧度秒 (arc.sec)	± 弧度秒 (arc.sec)	减速比
± 10	± 5	1/180
最大旋转速度 (rpm)	电机转轴转动 瞬间惯量 (kg.m)	产品净重 (kg)
11.1	0 00388	600
T槽宽度 (mm)	锁紧压力(油压) (Mpa)	锁紧扭力 (N · m)
18	6	3900

以上数据是配置FANUC电机时的数值，最大切削扭矩请控制在切削时间的20%及10秒以内

WDS-H630尺寸图

